


# KM-560 Series

KM-560-7 High Speed, Single Needle, Unison Feed, Lock Stitch Machine with 2.5 Fold-Capacity Hook and Automatic Thread Trimmer

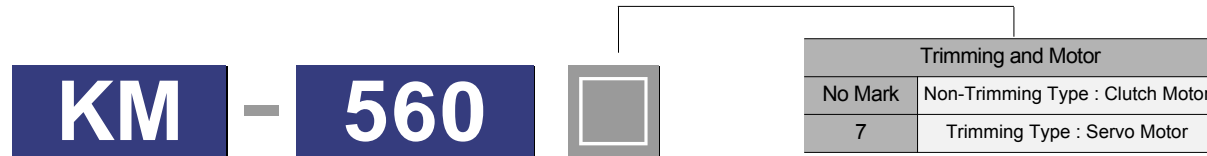

## Specification

Model	KM-560-7	KM-560
Application	Medium Material and Extra Heavy Material	
Max. Sewing Speed	3,000 spm	
Max. Stitch Length	8mm	
Needle Bar Stroke	34.2mm	
Thread Take-up Stroke	71.2mm	
Height of Presser Foot	10.5mm by Hand / 16mm by Knee(Max.)	
Height of Presser Foot(Automatic)	Max.16mm (Option)	-
The Height of Between Main and Sub Presser Foot	2~5.5mm	
Hook	2.5 Fold-Capacity Hook	
Needle	DP x 17 #22 (#16~#23)	
Trimming Device	Provided	-
Motor	Servo Motor	Clutch Motor

## Order Specification

Division	Use	Remarks
A	General material sewing (Skin, Leather, Canvas, 2mm edge Sewing)	Option
B	For thick material sewing (Seat sewing of skin, Leather and other material)	Standard
C	For thick material sewing (No upper thread cut pieces are left on the surface of material being sewn)	Option
D	For heavy thick material sewing	Option

**Applications** : Leather, Coats, Jackets, Jeans, Sports Shoes, Bags, Car Sheets or Furniture Sheets, Tents etc.

\* Specifications and appearance are subject to change for the improvement of products without prior notice.

High Speed, 1 Needle, Unison Feed, Lock Stitch Machine with Larger by 2.5 Fold-Capcity Hook

# KM-560 Series



## SunStar SUNSTAR MACHINERY CO., LTD.

**TRADE OFFICE**  
# 178-212, GAJWA - DONG, SEO - KU, INCHEON, KOREA  
TEL : (82 - 32) 580 - 5740 ~ 60 FAX : (82 - 32) 584 - 3025 ~ 6

**WEB-SITE** : <http://www.sunstar.co.kr>  
**E-MAIL** : [sunstar@sunstar.co.kr](mailto:sunstar@sunstar.co.kr)  
[fortuna@sunstar.co.kr](mailto:fortuna@sunstar.co.kr)

**OVERSEAS NETWORK**  
SUNSTAR MACHINERY (SHANGHAI) CO.,LTD.  
TEL : 86 21 6957 6311 FAX : 86 21 6957 6312  
SUNSTAR MACHINERY (SHANGHAI) CO.,LTD. SHANGHAI BRANCH  
TEL : 86 21 6353 2233 FAX : 86 21 6353 8640  
SUNSTAR QINGDAO BRANCH  
TEL : 86 532 482 2236 FAX : 86 532 481 1262  
SUNSTAR NANJING BRANCH  
TEL : 86 25 464 7389 FAX : 86 25 464 7389  
SUNSTAR HANGZHOU BRANCH  
TEL : 86 571 8704 4709 FAX : 86 571 8601 6046


**OVERSEAS NETWORK**  
SUNSTAR TIANJIN BRANCH  
TEL : 86 22 2445 8882 FAX : 86 22 2445 2400  
SUNSTAR HONGKONG LTD.  
TEL : 852 2729 7078 FAX : 852 2729 7573  
SUNSTAR GUANGDONG BRANCH  
TEL : 86 769 249 1610 FAX : 86 769 234 4042  
SUNSTAR FUJIAN BRANCH  
TEL : 86 595 8859 8871 FAX : 86 595 8859 8872  
SUNSTAR U.S.A INC.  
TEL : 1 305 591 9596 FAX : 1 305 591 0661  
SUNSTAR HOCHIMINH BRANCH OFFICE  
TEL : 84 8 811 0302 FAX : 84 8 811 4588  
SUNSTAR HANOI BRANCH OFFICE  
TEL : 84 4 734 0268 FAX : 84 4 734 0278  
SUNSTAR NEW DELHI OFFICE  
TEL : 91 124 280 3006 FAX : 91 124 280 3007  
SUNSTAR JAKARTA BRANCH OFFICE  
TEL : 62 21 4586 5839 FAX : 62 21 4586 5840  
SUNSTAR MACHINERY(SINGAPORE)  
TEL : 008 65 6341 5015 FAX : 008 65 6341 5016

AGENT:

# KM-560 Series


New, 1-needle, unison feed, sewing machine series developed through the advanced technology of SunStar

A new, higher level of advanced mechatronics has been ideally achieved by the grafting of the newly developed, automatic thread trimming Fortuna III AC servo motor, equipped with the most up-to-date function, to our new, 1-needle, unison feed sewing machine ; total integration of new, varied functions created for operational convenience. This new product will contribute greatly to upgrading variable of sewing pattern quality and to increased productivity.

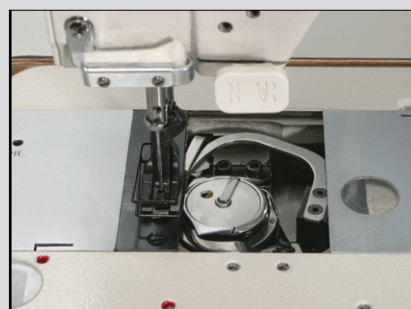


### Thread trimming knife structured for high reliability and wide operating periphery

Because this machine is equipped with highly durable plane surfacing system which perfectly cuts all sized of thread ranging from thin to thick, this machine is widely used for general purpose sewing as well as for heavy thick materials.

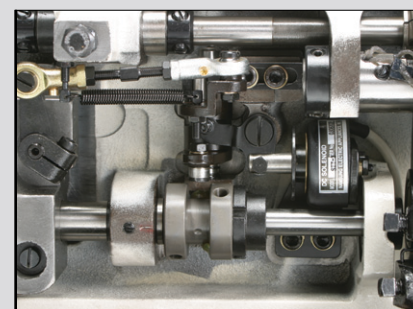

### Simply structured thread trimming drive system

- Superior anti-abrasive characteristics and high accurate knife operation.
- Simplicity of structure offers extremely easy adjustment, assembly and disassembly procedures.

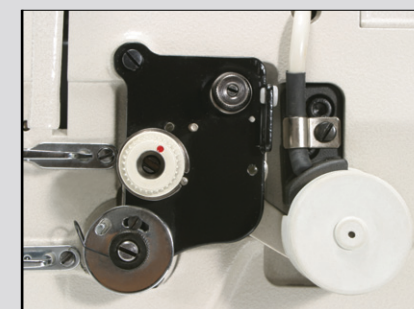

### Solenoid controlled thread tension easing device (thread trimming type)

- The length of upper thread remaining in the needle after thread trimming is freely adjustable simply by simple adjustment of volume control in control box.
- Simple solenoid type structure does not require cable connection.



### Strong and stabilized upper feed movement

Constructed in block type upper feed movement structure, this machine demonstrates strong power in stepped sewing and even in heavy thick material sewing.



### Accurate upper feed movement

The accurate movement of upper feed and gear action has eliminated puckerings and slip phenomena occurring on materials being sewn.




### Feed back button offering functional variety

Sensitive touch-button operation allows smooth reverse stitching as well as needle bar movement from top to bottom or vice versa.



### Larger by 2.5 Fold-Capacity hook installation

Work efficiency has been improved by installation

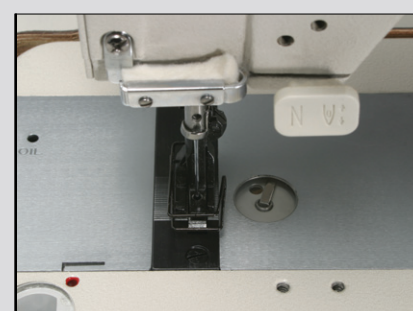

### Convenient bobbin thread check system

Thread remaining in the bobbin can be verified easily through inspection windows installed on the right side of board.



### Protection device for hook

- Damage to hooks caused by overload occurring during sewing operations is prevented with safety device of a ball-clamp type.
- Pressure control system operates as safety device by the simple bolt-adjustment.



### Bed direct-connection type, smoothly operating knee lifting system

- Knee lifting system not only operates smoothly, but raises the foot high.
- No extra knee lifting system installation is required on table.